


APPOLD – aluminium frame with timber insert

AGS system, TUT series, unrebated, flush

Single-leaf aluminium frame with timber insert without fanlight or overpanel

Frames according to DIN 68706-2

Type:	TUT series aluminium frame with timber insert. Mitre-joined frame, complete with spreader bar. Mounting brackets and mesh supplied separately. Wooden block frame unrebated on three sides.
Material:	Main frame - aluminium, non-coated; timber insert - solid timber, optionally veneered.
Sealing:	on three sides, white/beige/black, supplied separately.
Rebate:	for unrebated door leaves, 45 mm thick.
Hinge base:	two built-in Simons TECTUS TE 541 3D FVZ, color Alu F1.
Lock:	magnetic mortise lock, 55 mm backset, stainless steel face plate, fitted for profile cylinder, bathroom or warded locks.
Strike plate:	fitted stainless steel plate for magnetic locks.
Surface:	Veneer surfaces are UV-clear finished. Untreated Hardboard and Priming Film surfaces not coated.
Size Calculation:	wall opening minus 60 mm on all sides = clear opening of the frame.
Price Includes:	complete frame with timber insert, hinges, lock and strike plate. For door leaf options and additional fittings, please see separate price list.

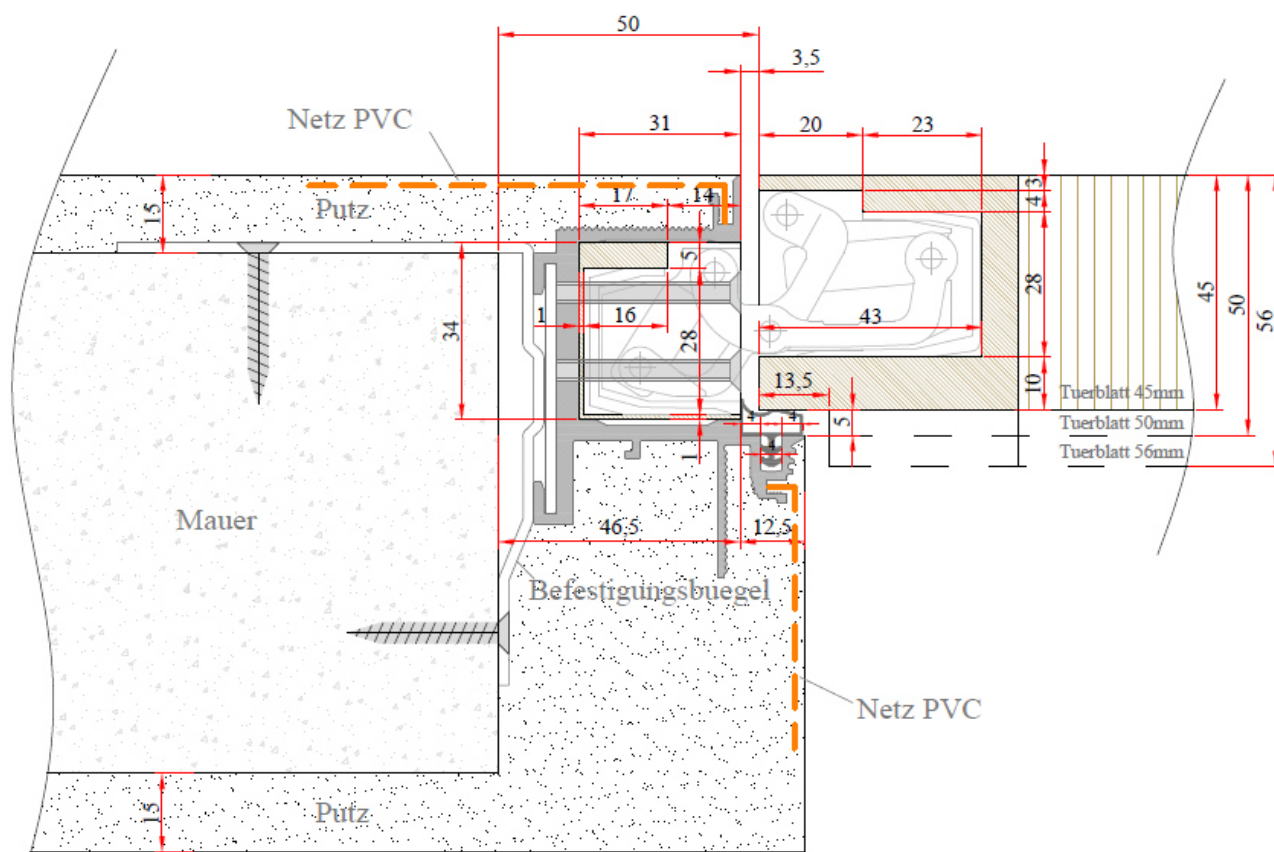

For other options, see Additional services